#### (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

### (19) World Intellectual Property Organization

International Bureau



### 

## (43) International Publication Date 25 August 2005 (25.08.2005)

### **PCT**

# (10) International Publication Number WO 2005/078244 A2

(51) International Patent Classification7:

F01L

(21) International Application Number:

PCT/JP2005/002965

(22) International Filing Date: 17 February 2005 (17.02.2005)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

2004-040247

17 February 2004 (17.02.2004) JP 17 February 2004 (17.02.2004) JP

2004-040246 17 February 2004

(71) Applicant (for all designated States except US): HONDA MOTOR CO., LTD. [JP/JP]; 1-1, Minami-Aoyama 2-chome, Minato-ku, Tokyo 1078556 (JP).


- (72) Inventor; and
- (75) Inventor/Applicant (for US only): TASHIRO, Masahiko

[JP/JP]; c/o Honda R & D Co., Ltd.,, 4-1, Chuo 1-chome, Wako-shi, Saitama 3510193 (JP).

- (74) Agents: OGURI, Shohei et al.; Eikoh Patent Office, 13th Floor, ARK Mori Building, 12-32, Akasaka 1-chome, Minato-ku, Tokyo 1076013 (JP).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: VALVE TRAIN FOR INTERNAL COMBUSTION ENGINE

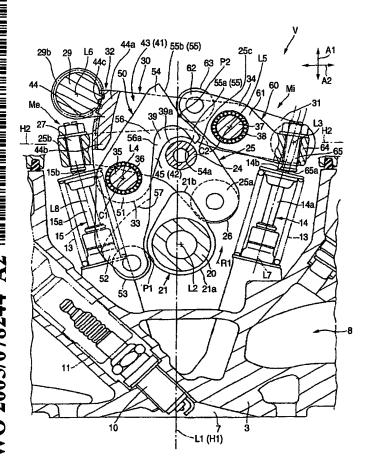

(57) Abstract: A valve train includes a primary rocker arm 50 oscillating about a primary oscillating center line L4 in response to the rotation of an inlet cam 21, a secondary rocker arm 60 oscillating about a secondary oscillating center line L5 so as to transmit a valve drive force via the primary rocker arm 50 to the inlet valve 14 and a holder 30 which supports the primary and secondary rocker arms 50, 60 in an oscillatory fashion in such a manner that the primary and secondary oscillating center lines L4, L5 oscillate together. A cam profile 55 has a lost motion profile 55a a drive profile 55b are formed on an abutment portion 54 of the primary rocker arm 50. A sectional shape of the lost motion profile 55a is an arc-like shape which is formed about the primary oscillating center line L4.